



Description

Aluminum alloy crossover ladder with steel or aluminum alloy grated treads.
Comes complete with stainless steel brackets and fasteners, and plastic or steel end caps.

Relevant regulations

D.lgs 81/2008 ISO 14122 - 3


Additional features

- Grated treads
- Tool-free removable guardrails
- Stainless steel fireproof end caps
- Non-standard height & width available on request
- Non-standard slope available on request
- Anodizing

Technical data

Stairway height	From 300 to 4000 mm
Slope angle	45°
Clear tread width	From 600 to 1000 mm
Stair riser height	200 mm
Handrail pipe diameter	Ø40mm
Stringers measurements	88x35 mm
Stairway material	Aluminum alloy 6063 T6
Brackets material	Stainless steel AISI 304
Fasteners material	Stainless steel AISI 304
End caps material	PA6/Stainless steel AISI 304

Available Models

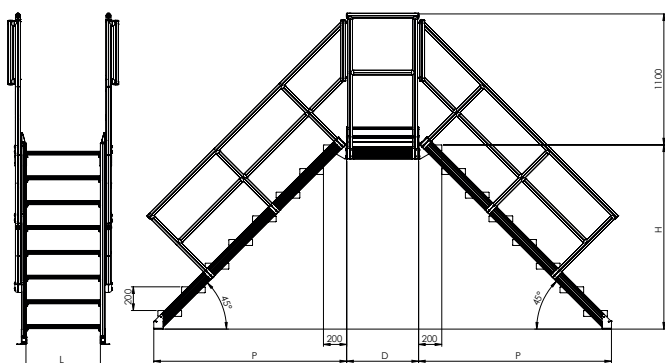

MODEL	STEPS	L *	H *	P *	D *
DK45 - 400	2	600	400	400	600
DK45 - 600	3	600	600	600	600
DK45 - 800	4	600	800	800	600
DK45 - 1000	5	600	1000	1000	600
DK45 - 1200	6	600	1200	1200	600
DK45 - 1400	7	600	1400	1400	600
DK45 - 1600	8	600	1600	1600	600
DK45 - 1800	9	600	1800	1800	600
DK45 - 2000	10	600	2000	2000	600
DK45 - 2200	11	600	2200	2200	600
DK45 - 2400	12	600	2400	2400	600

CREDA Enterprise Srl

Legal Office: Via Monte Rosa, 21 | 20149 Milano (MI)
Operating Office: Via Pacinotti, 42 | 20090 Corsico (MI)
02/47753091 | credaelevation.it | info@credae360.it