



Description

Aluminum alloy crossover ladder with steel or aluminum alloy grated treads.
 Comes complete with stainless steel brackets and fasteners, and plastic or steel end caps.

Relevant regulations

D.lgs 81/2008 ISO 14122 - 3

Additional features

- Grated treads

- Tool-free removable guardrails

- Stainless steel fireproof end caps

- Non-standard height & width available on request


- Non-standard slope available on request

- Anodizing

Technical data

Stairway height	From 300 to 4800 mm
Slope angle	60°
Clear tread width	From 600 to 1000 mm
Stair riser height	250 mm
Handrail pipe diameter	Ø40mm
Stringers measurements	88x35 mm
Stairway material	Aluminum alloy 6063 T6
Brackets material	Stainless steel AISI 304
Fasteners material	Stainless steel AISI 304
End caps material	PA6/Stainless steel AISI 304

Available Models

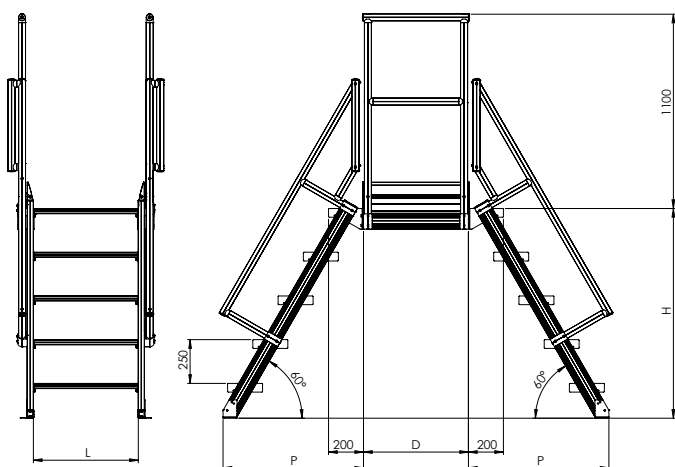

MODEL	STEPS	L *	H *	P *	D *
DK60 - 500	2	600	500	289	600
DK60 - 750	3	600	750	433	600
DK60 - 1000	4	600	1000	577	600
DK60 - 1250	5	600	1250	722	600
DK60 - 1500	6	600	1200	866	600
DK60 - 1750	7	600	1500	1010	600
DK60 - 2000	8	600	1750	1155	600
DK60 - 2250	9	600	2000	1299	600
DK60 - 2500	10	600	2250	1443	600
DK60 - 2750	11	600	2750	1588	600
DK60 - 3000	12	600	3000	1732	600

CREDA Enterprise Srl

Legal Office: Via Monte Rosa, 21 | 20149 Milano (MI)
 Operating Office: Via Pacinotti, 42 | 20090 Corsico (MI)
 02/47753091 | credaelevation.it | info@credae360.it