



Description

Aluminum alloy stairway with fiberglass treads. Comes complete with stainless steel brackets and fasteners, and plastic or steel end caps.

Relevant regulations

D.lgs 81/2008 ISO 14122 - 3


Additional features

- _____
Fiberglass treads
- _____
Tool-free removable guardrails
- _____
Stainless steel fireproof end caps
- _____
Non-standard height & width available on request
- _____
Non-standard slope available on request
- _____
Anodizing

Technical data

Stairway height	From 300 to 4800 mm
Slope angle	60°
Clear tread width	From 600 to 1000 mm
Stair riser height	250 mm
Handrail pipe diameter	Ø40mm
Stringers measurements	88x35 mm
Ladder material	Aluminum alloy 6063 T6
Brackets material	Stainless steel AISI 304
Fasteners material	Stainless steel AISI 304
End caps material	PA6/Stainless steel AISI 304

Available Models

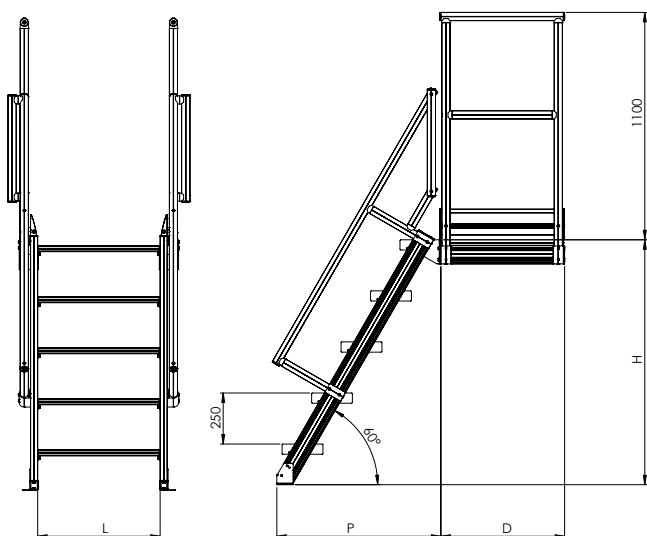

MODEL	STEPS	L *	H *	P *	D *
LN60 - 500	2	600	500	289	600
LN60 - 750	3	600	750	433	600
LN60 - 1000	4	600	1000	577	600
LN60 - 1250	5	600	1250	722	600
LN60 - 1500	6	600	1200	866	600
LN60 - 1750	7	600	1500	1010	600
LN60 - 2000	8	600	1750	1155	600
LN60 - 2250	9	600	2000	1299	600
LN60 - 2500	10	600	2250	1443	600
LN60 - 2750	11	600	2750	1588	600
LN60 - 3000	12	600	3000	1732	600

CREDA Enterprise Srl

Legal Office: Via Monte Rosa, 21 | 20149 Milano (MI)
 Operating Office: Via Pacinotti, 42 | 20090 Corsico (MI)
 02/47753091 | credaelevation.it | info@credae360.it