



Description

Aluminum alloy platform ladder with UltraGrip knurling. Comes complete with stainless steel brackets and fasteners, and plastic or steel end caps.

Relevant regulations

D.lgs 81/2008 ISO 14122 - 3

Additional features

- Perforated treads

- Tool-free removable guardrails

- Stainless steel fireproof end caps

- Non-standard height & width available on request


- Non-standard slope available on request

- Anodizing

Technical data

Ladder height	From 300 to 4000 mm
Slope angle	45°
Clear tread width	From 600 to 1000 mm
Stair riser height	200 mm
Handrail pipe diameter	Ø40mm
Stringers measurements	88x35 mm
Ladder material	Aluminum alloy 6063 T6
Brackets material	Stainless steel AISI 304
Fasteners material	Stainless steel AISI 304
End caps material	PA6/Stainless steel AISI 304

Available Models

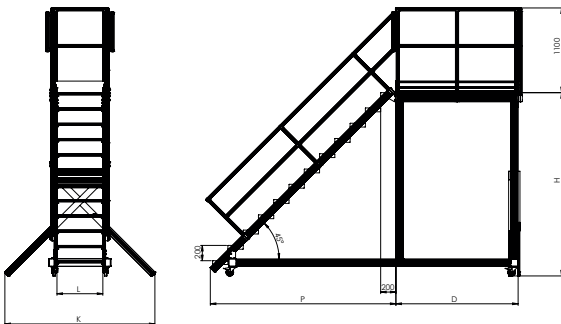

MODEL	STEPS	L *	H *	P *	D *	K *
RT45 - 1000	5	600	1000	1000	2000	1600
RT45 - 1200	6	600	1200	1200	2000	1600
RT45 - 1400	7	600	1400	1400	2000	1600
RT45 - 1600	8	600	1600	1600	2000	1800
RT45 - 1800	9	600	1800	1800	2000	1800
RT45 - 2000	10	600	2000	2000	2000	1800
RT45 - 2200	11	600	2200	2200	2000	2000
RT45 - 2400	12	600	2400	2400	2000	2000
RT45 - 2600	13	600	2600	2600	2000	2000
RT45 - 2800	14	600	2800	2800	2000	2000
RT45 - 3000	15	600	3000	3000	2000	2000
RT45 - 3200	16	600	3200	3200	2000	2200
RT45 - 3400	17	600	3400	3400	2000	2200

CREDA Enterprise Srl

Legal Office: Via Monte Rosa, 21 | 20149 Milano (MI)
 Operating Office: Via Pacinotti, 42 | 20090 Corsico (MI)
 02/47753091 | credaelevation.it | info@credae360.it