



### Description

Aluminum alloy platform ladder with UltraGrip knurling. Comes complete with stainless steel brackets and fasteners, and plastic or steel end caps.

### Relevant regulations

D.lgs 81/2008      ISO 14122 - 3

### Additional features

- Perforated treads

---

- Tool-free removable guardrails

---

- Stainless steel fireproof end caps

---

- Non-standard height & width available on request

---

- Non-standard slope available on request


---

- Anodizing

### Technical data

Ladder height	From 300 to 4800 mm
Slope angle	60°
Clear tread width	From 600 to 1000 mm
Stair riser height	250 mm
Handrail pipe diameter	Ø40mm
Stringers measurements	88x35 mm
Ladder material	Aluminum alloy 6063 T6
Brackets material	Stainless steel AISI 304
Fasteners material	Stainless steel AISI 304
End caps material	PA6/Stainless steel AISI 304

### Available Models

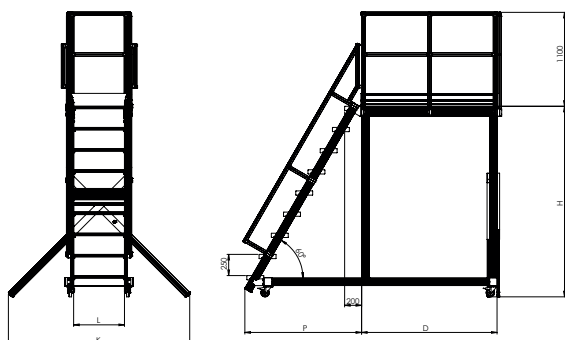

MODEL	STEPS	L *	H *	P *	D *	K *
RT60 - 1000	4	600	1000	577	2000	1600
RT60 - 1250	5	600	1250	722	2000	1600
RT60 - 1500	6	600	1500	866	2000	1600
RT60 - 1750	7	600	1750	1010	2000	1800
RT60 - 2000	8	600	2000	1155	2000	1800
RT60 - 2250	9	600	2250	1299	2000	1800
RT60 - 2500	10	600	2500	1443	2000	2000
RT60 - 2750	11	600	2750	1588	2000	2000
RT60 - 3000	12	600	3000	1732	2000	2000
RT60 - 3250	13	600	3250	1876	2000	2000
RT60 - 3500	14	600	3500	2021	2000	2000
RT60 - 3750	15	600	3750	2165	2000	2200
RT60 - 4000	16	600	4000	2309	2000	2200

### CREDA Enterprise Srl

Legal Office: Via Monte Rosa, 21 | 20149 Milano (MI)  
 Operating Office: Via Pacinotti, 42 | 20090 Corsico (MI)  
 02/47753091 | credaelevation.it | info@credae360.it