



Description

Aluminum alloy cantilever ladder with grated treads available in aluminum alloy or steel. The cantilever is available in different lengths or customizable. Comes complete with stainless steel brackets and fasteners, and plastic or steel end caps.

Relevant regulations

D.lgs 81/2008 ISO 14122 - 3

Additional features

- Grated treads

- Tool-free removable guardrails

- Stainless steel fireproof end caps

- Non-standard height & width available on request


- Non-standard slope available on request

- Anodizing

Technical data

Ladder height	From 300 to 4800 mm
Slope angle	60°
Clear tread width	From 600 to 1000 mm
Stair riser height	250 mm
Handrail pipe diameter	Ø40mm
Stringers measurements	88x35 mm
Ladder material	Aluminum alloy 6063 T6
Brackets material	Stainless steel AISI 304
Fasteners material	Stainless steel AISI 304
End caps material	PA6/Stainless steel AISI 304

Available Models

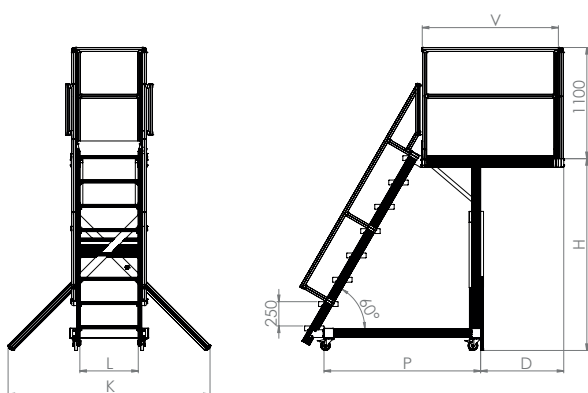

MODEL	STEPS	L *	H *	P *	D *	K *	V *
RJ45 - 1000	4	600	1000	577	600	1600	1400
RJ45 - 1200	5	600	1250	722	600	1600	1400
RJ45 - 1400	6	600	1500	866	600	1600	1400
RJ45 - 1600	7	600	1750	1010	600	1800	1400
RJ45 - 1800	8	600	2000	1155	600	1800	1400
RJ45 - 2000	9	600	2250	1299	600	1800	1400
RJ45 - 2200	10	600	2500	1443	600	2000	1400
RJ45 - 2400	11	600	2750	1588	600	2000	1400
RJ45 - 2600	12	600	3000	1732	600	2000	1400
RJ45 - 2800	13	600	3250	1876	600	2000	1400
RJ45 - 3000	14	600	3500	2021	600	2000	1400
RJ45 - 3200	15	600	3750	2165	600	2200	1400
RJ45 - 3400	16	600	4000	2309	600	2200	1400

CREDA Enterprise Srl