Product Technical Data Sheet CREDA 360 Stairway

STAIRWAY 45 VR

D.lgs 81/2008 ISO 14122-3 Regulation Compliant

Description

Aluminum alloy stairway with fiberglass treads. Comes complete with stainless steel brackets and fasteners, and plastic or steel end caps.

Relevant regulations

D.lgs 81/2008 ISO 14122 - 3

Additional features

Fiberglass treads

Tool-free removable guardrails

Stainless steel fireproof end caps

Non-standard height & width available on request

Non-standard slope available on request

Anodizing

Technical data

Stairway height	From 300 to 4000 mm
Slope angle	45°
Clear tread width	From 600 to 1000 mm
Stair riser height	200 mm
Handrail pipe diameter	Ø40mm
Stringers measurements	88x35 mm
Ladder material	Aluminum alloy 6063 T6
Brackets material	Stainless steel AISI 304
Fasteners material	Stainless steel AISI 304
End caps material	PA6/Stainless steel AISI 304

Available Models

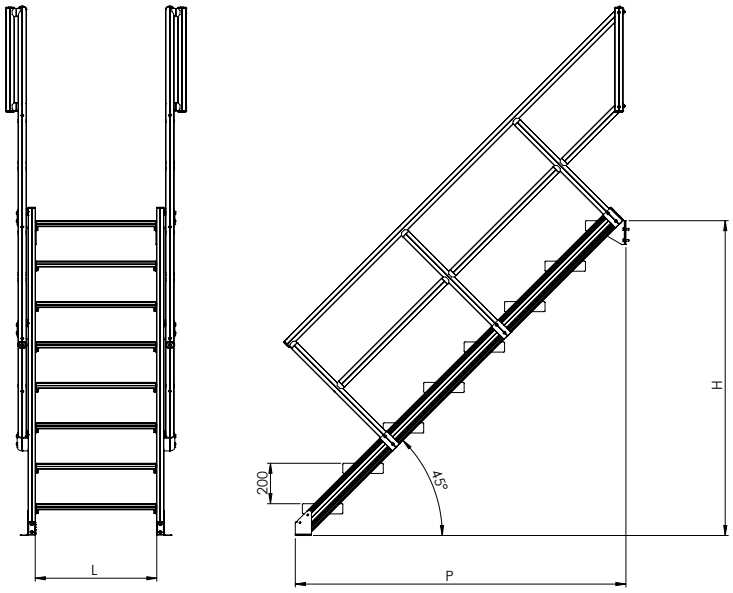

MODEL	STEPS	L *	H *	P *
ST45 - 400	2	600	400	400
ST45 - 600	3	600	600	600
ST45 - 800	4	600	800	800
ST45 - 1000	5	600	1000	1000
ST45 - 1200	6	600	1200	1200
ST45 - 1400	7	600	1400	1400
ST45 - 1600	8	600	1600	1600
ST45 - 1800	9	600	1800	1800
ST45 - 2000	10	600	2000	2000
ST45 - 2200	11	600	2200	2200
ST45 - 2400	12	600	2400	2400

CREDA Enterprise Srl
Legal Office: Via Monte Rosa, 21 | 20149 Milano (MI)
Operating Office: Via Pacinotti, 42 | 20090 Corsico (MI)
02/47753091 | credaelevation.it | info@credae360.it